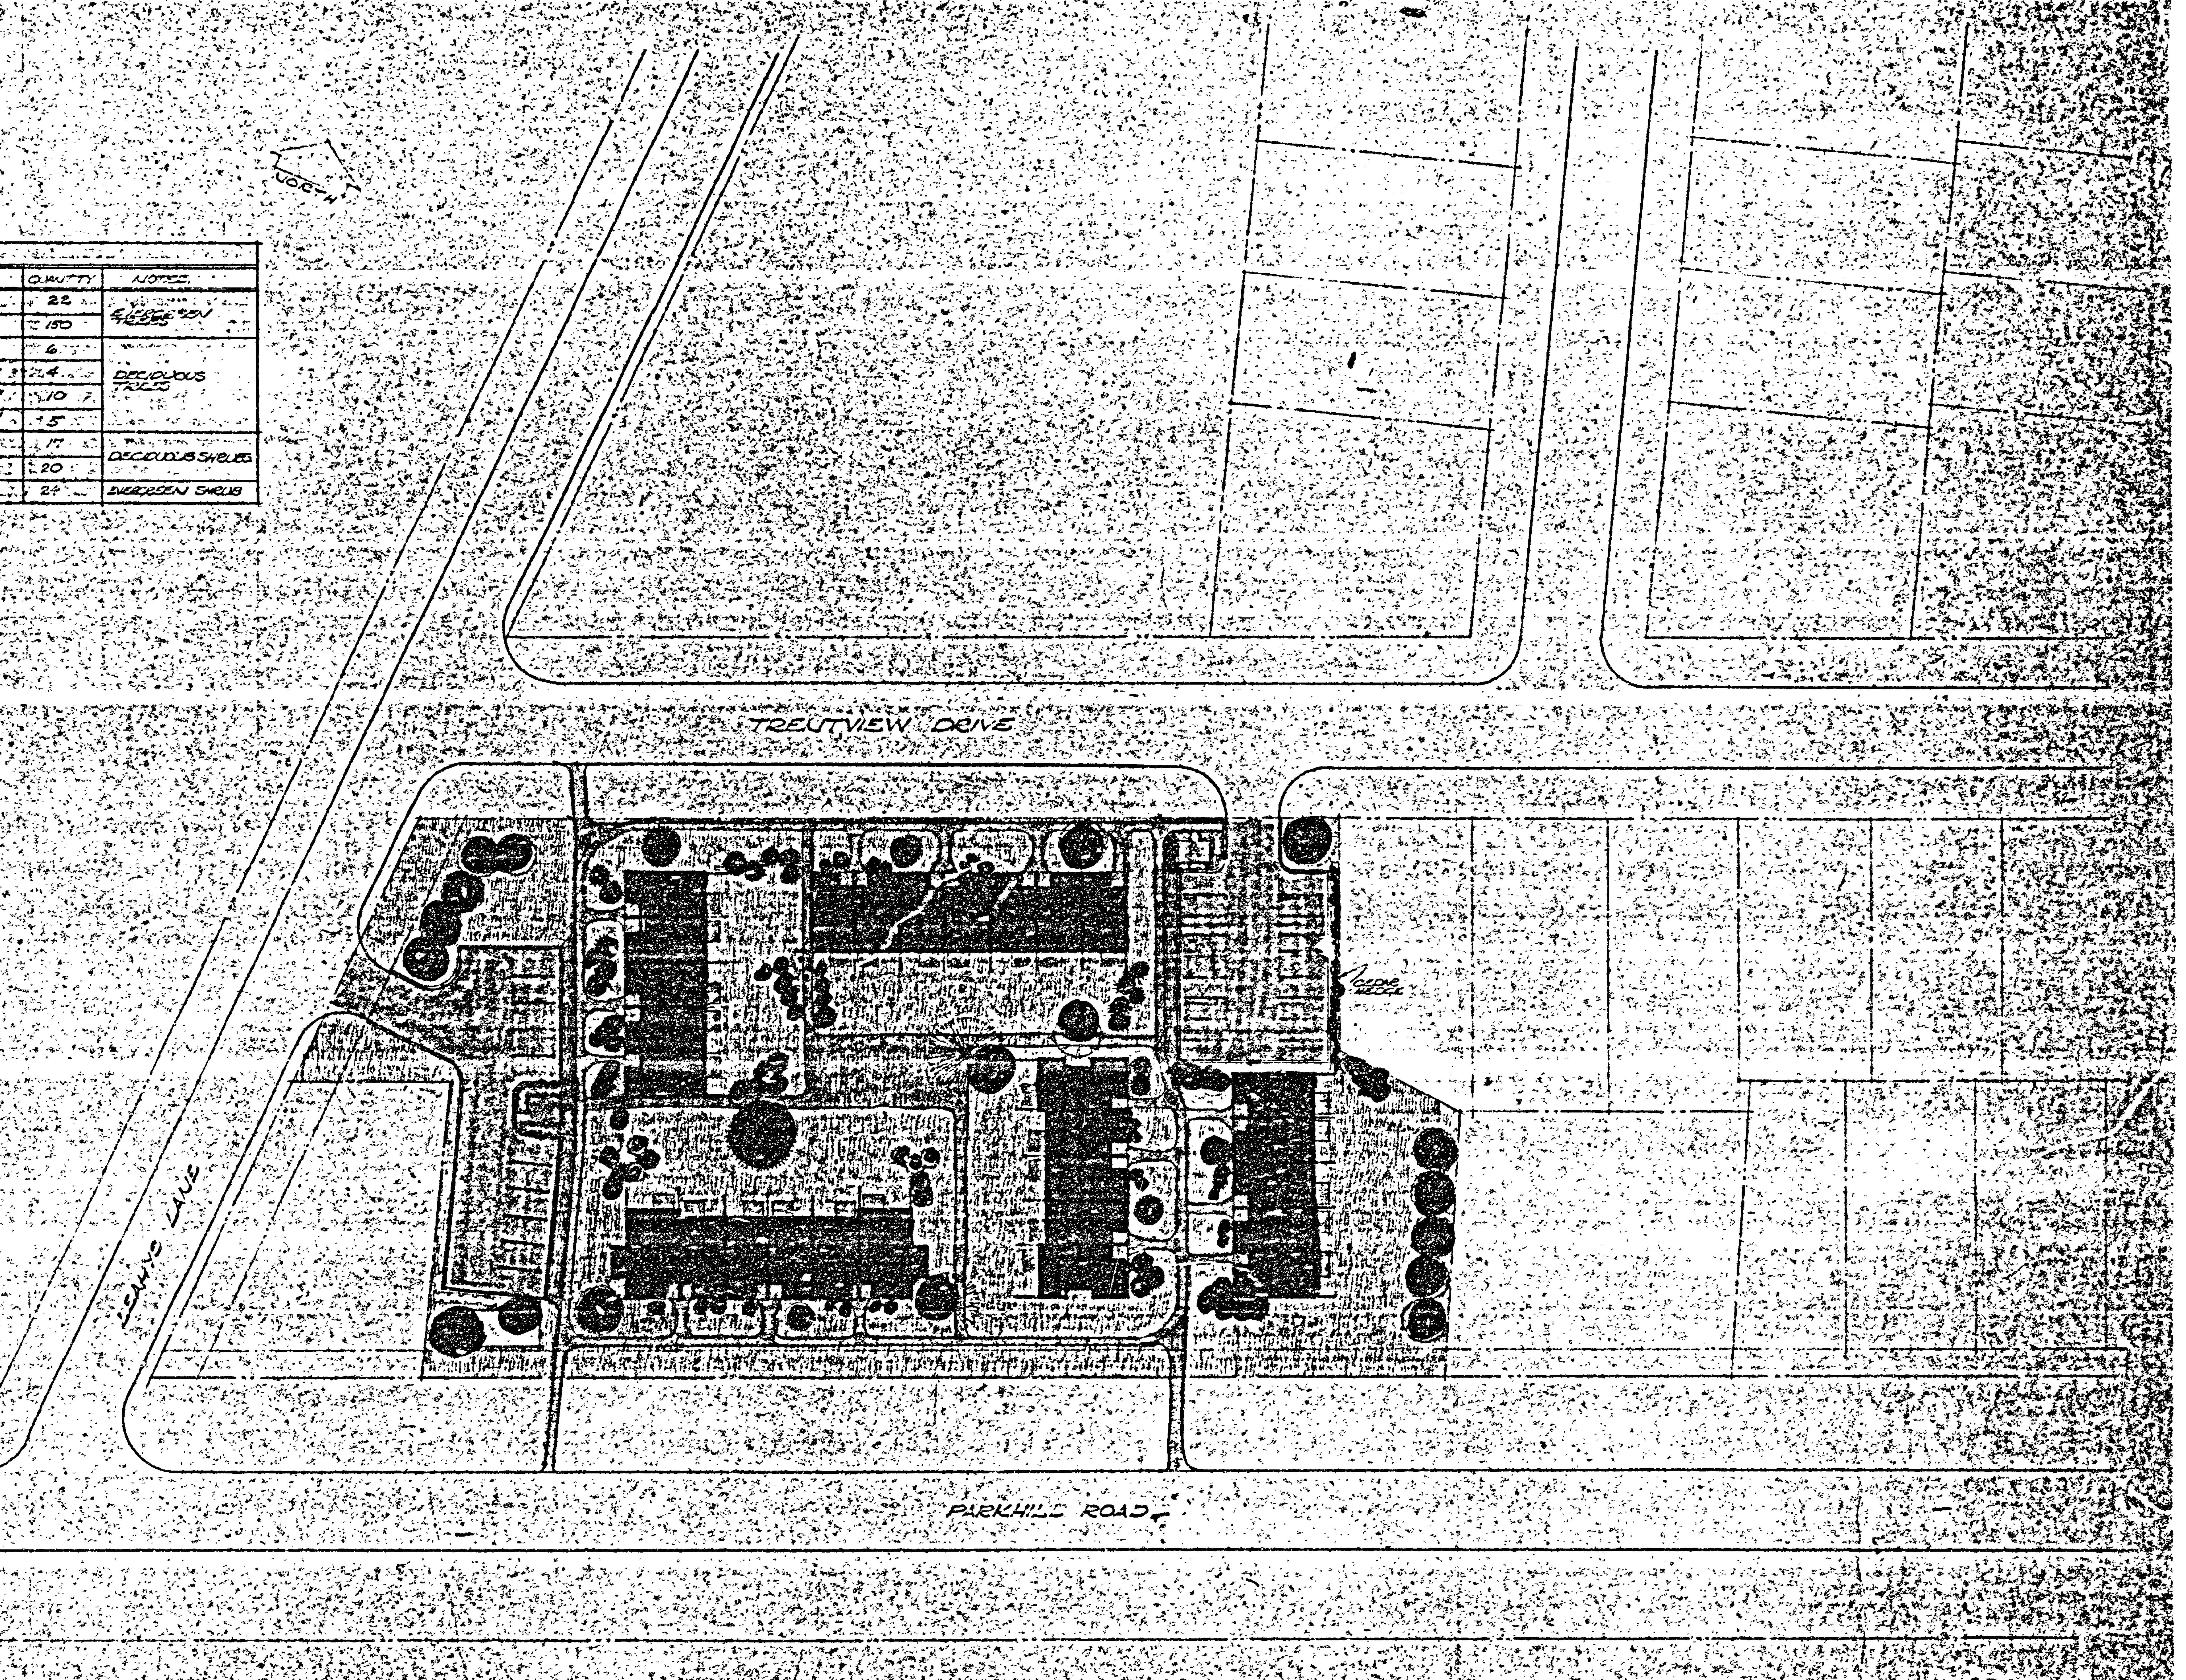

LIST OF PLANT MATERIAL					
COMMON NAME	BOTANICAL NAME	CALIPER	SIZE	QUANTITY	NOTES
SCOTCH PINE	PINUS [illegible]	~	3'-4'	22	EVERGREEN TREES
WHITE CEDAR	THUJA OCCIDENTALIS	~	3'-4'	150	
PAPER BIRCH (CLUMP)	BETULA PAPYRIFERA	1"-2"	8'-10'	6	DECIDUOUS TREES
SUGAR MAPLE	ACER SACCHARUM	1"-2"	8'-10'	4	
LOMBARDY POPLAR	POPULUS NIGRA [illegible]	2"-2½"	10'-12'	10	
WEEPING WILLOW	SALIX BABYLONICA	2"-3"	12'-14'	5	
LILAC	SYRINGA VULGARIS	CLUMP	4'-6'	17	DECIDUOUS SHRUBS
MOCK ORANGE	PHILADELPHUS	CLUMP	4'-6'	20	
MUGHO PINE	PINUS MUGHO MUGHUS	~	1'-2'	24	EVERGREEN SHRUB

LEGEND	
✳	SCOTCH PINE
▭	WHITE CEDAR
⊙	PAPER BIRCH
❂	MAPLE
⊙	LOMBARDY POPLAR
✺	WEEPING WILLOW
LLLL	LILAC
SSSS	MOCK ORANGE
*	MUGHO PINE
▨	SODDED AREAS

LANDSCAPE PLAN M3131-L01

OH 10-3136

REVISIONS		
DATE	No.	DESCRIPTION
NOV 28/60	1	BLOCK "E" AND SUPPORTING LAND (LOT 7) ADDED TO ORIGINAL 23 UNITS. 6 EACH OF LILAC, MOCK ORANGE, & MUGHO PINE, ADDED.
APRIL 10/61	2	CEDAR HEDGE ADDED BETWEEN NORTH EAST PARKING LOT & ADJOINING PROPERTY.

ONTARIO HOUSING CORPORATION
FAMILY HOUSING PROJECT
PARKHILL RD. - PETERBOROUGH

CHARLES HUFFMAN LTD. - PETERBOROUGH
GENERAL CONTRACTOR

WILLIAM LETT — ARCHITECT
85 COLBORNE ST., TORONTO 1, TEL. [illegible]

SCALE: 1" = 30'-0"
DATE: OCT. 1, 1960
DRAWN: W.P.
PROJECT No. 6002

DRAWING No. 2 OF SEVEN